

HITACHI

SuperEX

EX400/EX450H

Rated Engine HP: 221 kW (300 PS)

Operating Weights

EX400-3C: 41 700 kg (91 900 lb)

EX400LC-3C: 45 400 kg (100 100 lb)

EX450H-3C: 43 800 kg (96 600 lb)

EX450LCH-3C: 46 200 kg (101 900 lb)

Bucket Capacity

PCSA Heaped: 1.36—2.28 m³ (1.78—2.98 yd³)

CECE Heaped: 1.20—2.00 m³



SuperEX EX400

The Hitachi big EX400 and EX450H hydraulic excavators are packed with many requested features — productivity, ruggedness, operator comfort, maintainability and environmental protection awareness.



Quick Response to Lever Control

Up-down movement of the boom is well matched with lever inching control. This brings productivity to tamping in civil engineering works and land grading projects. Power Boost yields power surges, when needed, at the touch of a finger.



Advanced Four Work Mode Selector

The operator can choose from the four work modes — general purpose mode, trenching mode, grading mode and precision mode — according to job needs.

Curved Monitor

The monitor is ergonomically curved for easy reading. Touch-control resin-molded switches seal out dirt.




Emissions Control Engine

The engine is designed to reduce pollutants (hydrocarbons, carbon monoxide and nitrogen oxides) in gas emissions for environmental protection, conforming to the Emission Standards in Japan and USA.




Big, Rugged Body Gives Power and Speed When Needed at Tough Job Sites.

Fuel-efficient 300 PS (296 HP) direct injection turbo engine and high-pressure pump yield big production and achieve low fuel consumption.

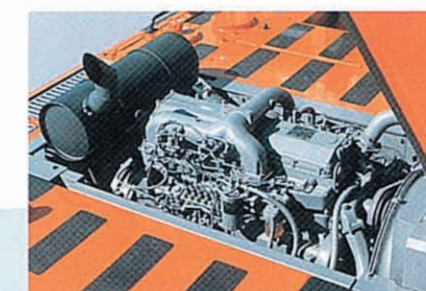

E-P Control for Bigger Production

The job-proven E-P (Engine-Pump) control delivers power and speed to suit job requirements. Auto Idle is provided for energy savings when idling.



Noise Suppression

Bell-mouth fan shroud and large-capacity muffler successfully reduce air blowing noise and turbulence noise.

Noise levels:

73 dB (A) at operator's ear in cab
78 dB (A) at 7 m (2'4") away

The machine shown on this catalog is positioned for advertising purpose. Be sure to lower the front attachment onto the ground when you leave the machine, with safety in mind.

● Comfortable Shock-dampening Ride

Six-point cab support mount effectively dampens shocks and vibration. Six seat adjustments — including seat tilt angle and height adjustments — help the operator to find the most comfortable operating position. This advanced suspension seat enhances riding comfort.


Cab support types:

Six-point support type on standard cab.

Eight-point support type on pressurized cab with integrated headguard (H cab).



Seat Belt

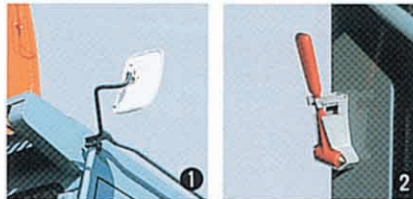


① Side mirror is added on the cab side for quick rear viewing.


② Emergency evacuation hammer is provided in the cab for getting out of the cab in the case of an emergency.



③ Fresh air type air conditioner and hot-and-cool box are available optionally.

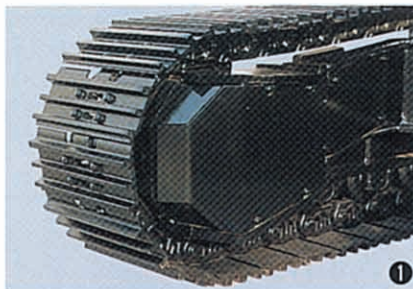


① Travel motor cover protects the travel motor from damage. Piping is housed inside the track frame for protection against impacts.

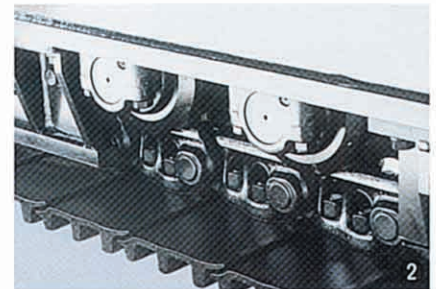

② Large track links are fitted with struts for added durability. Pin seal prevents dirt entry and reduces internal wear.


H Hitachi's Design Advances Stay Ahead.

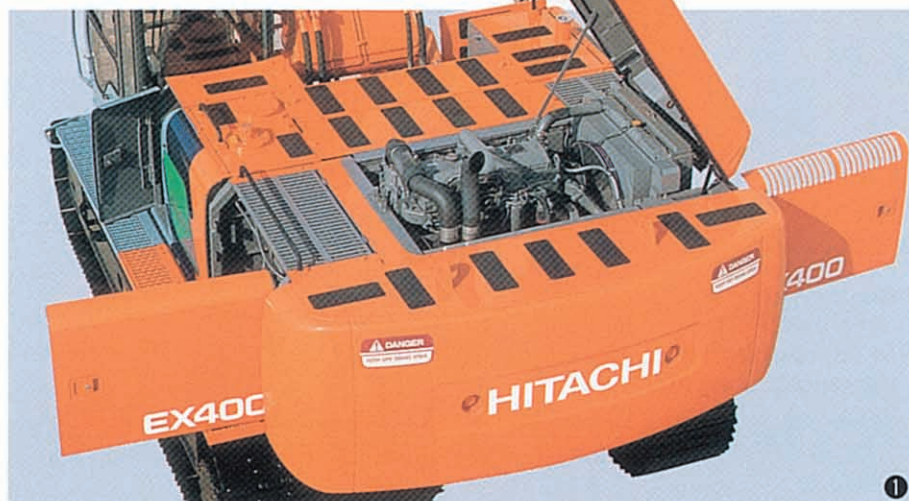

① **Engine cover with damper** can be fully opened, giving easy access to the engine for easy maintenance and inspection.




② **Side walk as well as non-slip tapes and handrails** are provided for convenience of maintenance and inspection.

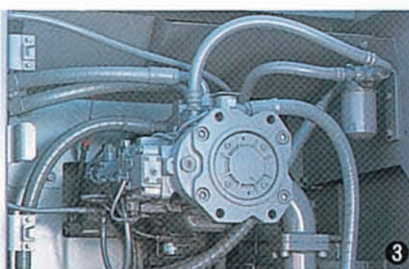

③ **Bulkhead** is provided between pump and engine.



④ **Electric grease gun with hose reel (optional)** enhances easy lubrication without need for repositioning of the machine. Front attachment and swing circle can be remote lubricated.

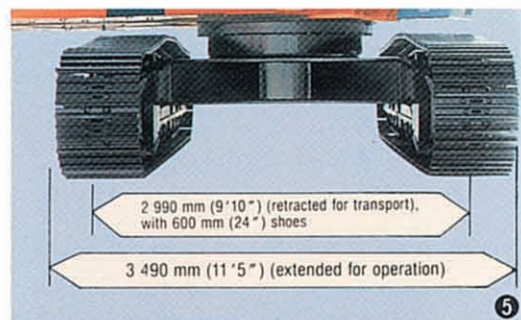

⑤ **Retractable track frames (LC type)** can be extended for higher stability at work, and retracted for convenience of transport.

Overall undercarriage width:
3 490 mm (11'5") w/ 600 mm (24") shoes

Overall undercarriage length:
5 470 mm (17'11")



③ **Bucket link A** is cast monolithically to resist torsion for added durability.



④ **Interlocking mounting side cutters** prevent the bucket side plates from wear, increasing durability.

SuperEX EX450H

D

esigned for Tough Operation with Numerous Rugged Body Design Features.




Thickened Bucket Bottom Plates
Wear plate is doubled at the bucket bottom for increased wear resistance.



Damage prevention plate and square bars are provided at the bottom of the arm for protection against damage due to rocks caught during excavation.




Strengthened Side Shrouds
Side shrouds are enlarged and strengthened to reduce wear of bucket side plates.

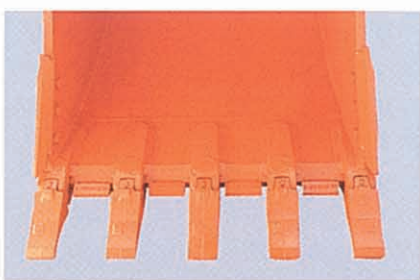


Cutting edge shrouds are thickened to increase wear resistance.



Big bucket teeth are utilized for rock excavation to prevent disengagement and increase wear resistance.

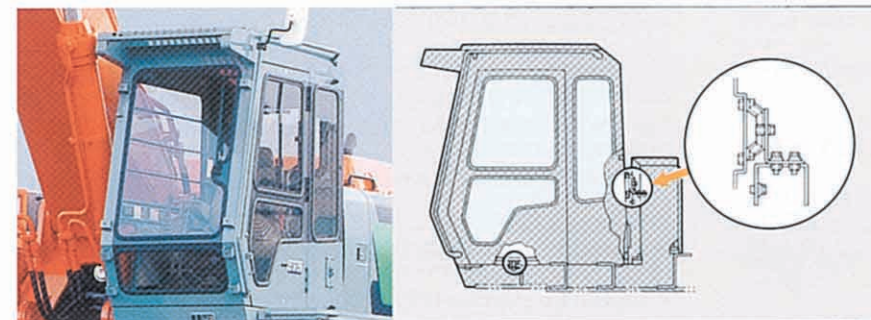

The pressurized cab with integrated headguard protects the operator from falling objects. Eight-point bed support mount effectively dampens shocks and increases durability. The cab is pressurized to prevent dirt entry.

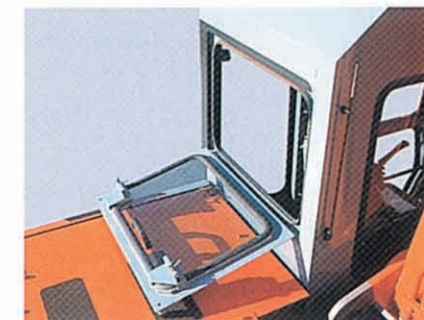


Emergency Evacuation Window
Rear window of the cab serves as an emergency exit for getting out of the cab.



Cab front guard and sunvisor are optionally available for the pressurized cab with integrated headguard.



Strengthened Undercover
Thickened undercover at the bottom of the upperstructure protects hydraulic equipment from damage due to obstructions during travel.

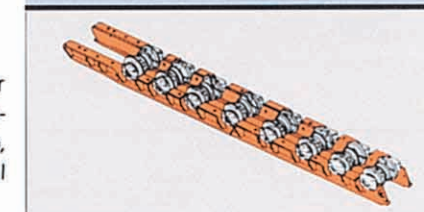

Track Guard
Large-sized track guard, extending over three lower rollers, prevents disengagement and protects lower rollers. Also, bolted design eases replacement. Full track guard is optionally available.

SPECIFICATIONS



ENGINE

Model	Isuzu A-6RB1TQA
Type	4-cycle water-cooled, direct injection
Aspiration	Turbocharged
No. of cylinders	6
Rated flywheel	221 kW (300 PS) at 2 000 min ⁻¹ (rpm)
horsepower (DIN 6271, net)	
Rated flywheel	221 kW (296 HP) at 2 000 min ⁻¹ (rpm)
horsepower (SAE J1349, net)	
Maximum torque	1 230 N·m (125 kgf·m, 904 lbf·ft)
	at 1 400 min ⁻¹ (rpm)
Piston displacement	13.74 L (838 in ³)
Bore and stroke	135 mm × 160 mm (5.3" × 6.3")
Batteries	2 × 12 V, 170 AH
Governor	Mechanical, speed control by stepping motor



HYDRAULIC SYSTEM

Hitachi's new ETS (Electronic Total control System) designed for higher job efficiency with less fuel consumption/noise.

Main pumps	2-variable displacement axial piston pumps
Maximum oil flow	2 × 360 L/min (95.1 US gpm, 79.3 Imp gpm)
Pilot pump	1 gear pump
Maximum oil flow	33.6 L/min (8.9 US gpm, 7.4 Imp gpm)

Hydraulic Motors

Travel	2 axial piston motors with parking brake
Swing	2 axial piston motors

Relief Valve Settings

Implement circuit	29.4 MPa (300 kgf/cm ² , 4 270 psi)
Swing circuit	24.5 MPa (250 kgf/cm ² , 3 560 psi)
Travel circuit	34.3 MPa (350 kgf/cm ² , 4 980 psi)
Pilot circuit	3.9 MPa (40 kgf/cm ² , 570 psi)

Hydraulic Cylinders

Cylinder cushion mechanisms are provided for all cylinders to absorb shock when pistons reach their stroke ends.

Dimensions

	Qty	Bore	Rod diameter
Boom	2	170 mm (6.69")	115 mm (4.53")
Arm	1	190 mm (7.48")	130 mm (5.11")
Bucket	1	170 mm (6.69")	115 mm (4.53")

Hydraulic Filters

All hydraulic circuits use hydraulic filters. A suction filter is built in suction line, and 10 μm full-flow filters in return circuit and swing/travel motor drain lines.



CONTROLS

Pilot controls for all functions. Hitachi original shockless valve and quick warm-up system built in the pilot circuit.

Implement levers	2
Travel levers with pedals	2



UNDERCARRIAGE

Revolving Frame

Welded, sturdy box construction using, heavy-gauge steel plates for ruggedness. D-section frame for resistance to deformation.

Swing Mechanism

Axial piston motor with planetary reduction gear is bathed in oil. Swing circle is single-row, shear-type ball bearing with induction-hardened internal gear. Internal gear and pinion gear are immersed in lubricant. Swing parking brake is spring-set/hydraulic-released disc type. Swing cushion valve built in swing motor absorbs shocks when stopping swing.

Swing speed 9.0 min⁻¹ (rpm)

Operator's Cab

Independent, roomy cab, 940 mm (37") wide by 1 620 mm (64") high, conforming to ISO* Standards. Reinforced glass windows on 4 sides for excellent visibility. Front windows (upper and lower) are openable and storable in the cab. Adjustable, reclining seat with arm-rests; movable with or without control levers and monitor panel.

* International Standard Organization



UPPERSTRUCTURE

Tracks

Tractor-type undercarriage. Welded track frame, using carefully selected materials for tough jobs. Side frame welded to track frame. Lubricated track rollers, idlers, and sprockets with floating seals. Track shoes with triple grouser made of induction-hardened rolled alloy. Heat-treated connecting pins with dirt seals. Hydraulic (grease) track adjusters with shock-absorbing recoil springs.

Numbers of Rollers and Shoes on Each Side

Upper rollers	2	EX400-3C/EX450H-3C
	3	EX400LC-3C/EX450LCH-3C
Lower rollers	8	EX400-3C/EX450H-3C
	9	EX400LC-3C/EX450LCH-3C
Track shoes	47	EX400-3C/EX450H-3C
	53	EX400LC-3C/EX450LCH-3C
Track guard (front)	1	
(center)	1	EX400-3C
	2	EX450H-3C/EX400LC-3C/EX450LCH-3C
(H-type only)	1	EX450H-3C/EX450LCH-3C

Traction Device

Each track driven by axial piston motor through reduction gears for counterrotation of the tracks. Sprockets are replaceable. Parking brake is spring-set/hydraulic-released disc type.

Two-speed travel, and auto speed shifting.

Travel speeds	High: 0 to 5.5 km/h (3.4 mph)
	Auto: 3.4 to 5.5 km/h (3.4-2.1 mph)
	Low: 0 to 3.4 km/h (2.1 mph)

Maximum traction force 319 kN (32 500 kgf, 71 600 lbf)

Gradeability 35° (70%) continuous

WEIGHTS AND GROUND PRESSURE

Backhoe

EX400-3c/EX400LC-3c:

Equipped with 7.0 m (23'0") boom, 3.4 m (11'2") arm, and 1.82 m³ (2.38 yd³; PCSA heaped) bucket.

Shoe type	Shoe width	Operating weight	Ground pressure
Triple grouser	600 mm (24")	41 700 kg (91 900 lb)	78 kPa (0.79 kgf/cm ² , 11.2 psi)
		44 300 kg (97 700 lb)	75 kPa (0.77 kgf/cm ² , 10.9 psi)
	750 mm (30")	42 700 kg (94 100 lb)	63 kPa (0.65 kgf/cm ² , 9.24 psi)
		45 400 kg (100 100 lb)	62 kPa (0.63 kgf/cm ² , 8.96 psi)
	900 mm (35")	42 800 kg (94 400 lb)	53 kPa (0.54 kgf/cm ² , 7.68 psi)
		45 500 kg (100 300 lb)	51 kPa (0.52 kgf/cm ² , 7.39 psi)

Figures in are data on the EX400LC-3c.

Note: Depending on the jobsite conditions, 750 mm (30") grouser shoe and 900 mm (35") grouser shoe may not be recommended for rock, hard surface or forestry application.

EX450H-3c/EX450LCH-3c:

Equipped with 7.0 m (23'0") H-boom, 3.4 m (11'2") H-arm, and 1.82 m³ (2.38 yd³; PCSA heaped) rock bucket.

Shoe type	Shoe width	Operating weight	Ground pressure
Triple grouser	600 mm (24")	43 800 kg (96 600 lb)	81 kPa (0.83 kgf/cm ² , 11.8 psi)
		46 200 kg (101 900 lb)	78 kPa (0.80 kgf/cm ² , 11.4 psi)
	750 mm (30")	44 800 kg (98 800 lb)	67 kPa (0.68 kgf/cm ² , 9.67 psi)
		47 300 kg (104 300 lb)	64 kPa (0.65 kgf/cm ² , 9.24 psi)

Figures in are data on the EX450LCH-3c.

Loading Shovel

Equipped with 2.6 m³ (3.40 yd³) bottom dump bucket

Shoe type	Shoe width	Operating weight	Ground pressure
Triple grouser	600 mm (24")	43 400 kg (95 700 lb)	81 kPa (0.82 kgf/cm ² , 11.7 psi)

Equipped with 2.8 m³ (3.66 yd³) tilt dump bucket

Shoe type	Shoe width	Operating weight	Ground pressure
Triple grousers	600 mm (24")	43 200 kg (95 200 lb)	80 kPa (0.82 kgf/cm ² , 11.7 psi)

Backhoe Buckets

Capacity		Width		No. of teeth	Weight	Recommendation									
PCSA heaped	CECE heaped	Without side cutters	With side cutters			EX400-3c				EX400LC-3c				EX450H-3c	EX450LCH-3c
						2.9 m (9'6") arm	3.4 m (11'2") arm	3.9 m (12'10") arm	4.9 m (16'1") arm	2.9 m (9'6") arm	3.4 m (11'2") arm	3.9 m (12'10") arm	4.9 m (16'1") arm	3.4 m (11'2") H-arm	3.4 m (11'2") H-arm
1.36 m ³ (1.78 yd ³)	1.20 m ³	1 280 mm (4'2")	1 410 mm (4'8")	5	1 170 kg (2 580 lb)	—	—	—	●	—	—	—	●	—	—
1.60 m ³ (2.09 yd ³)	1.40 m ³	1 220 mm (4'0")	1 360 mm (4'6")	5	1 460 kg (3 220 lb)	●	●	●	—	●	●	●	—	●	●
1.82 m ³ (2.38 yd ³)	1.60 m ³	1 360 mm (4'6")	1 500 mm (4'11")	5	1 550 kg (3 420 lb)	●	●	□	—	●	●	●	—	●	●
2.07 m ³ (2.71 yd ³)	1.80 m ³	1 490 mm (4'11")	1 630 mm (5'4")	5	1 630 kg (3 590 lb)	●	□	—	—	●	●	□	—	□	●
2.28 m ³ (2.98 yd ³)	2.00 m ³	1 520 mm (5'0")	1 660 mm (5'5")	5	1 780 kg (3 920 lb)	□	—	—	—	●	□	—	—	—	□
*1 1.82 m ³ (2.38 yd ³)	1.60 m ³	1 400 mm (4'7")	1 420 mm (4'8")	5	1 980 kg (4 370 lb)	●	●	—	—	●	●	—	—	●	●
*2 1.36 m ³ (1.78 yd ³)	1.20 m ³	1 170 mm (3'10")	—	1	2 330 kg (5 140 lb)	●	●	—	—	●	●	—	—	●	●
One-point ripper					1 260 kg (2 780 lb)	●	●	—	—	●	●	—	—	●	●

*1 Rock bucket
*2 Ripper bucket

1.82 m³ (2.38 yd³) rock bucket equipped with side shroud.
EX450H-3c and EX450LCH-3c equipped with H-front.

Loading Shovel Buckets

Capacity	Max. width	No. of teeth	Weight	Type
2.3 m ³ (3.01 yd ³)	1 860 mm (6'1")	6	3 380 kg (7 450 lb)	Bottom dump type rock bucket
2.6 m ³ (3.40 yd ³)	2 030 mm (6'8")	6	3 050 kg (6 730 lb)	Bottom dump type general purpose bucket
2.6 m ³ (3.40 yd ³)	1 900 mm (6'3")	6	2 740 kg (6 040 lb)	Tilt dump type rock bucket
2.8 m ³ (3.66 yd ³)	2 000 mm (6'7")	6	2 820 kg (6 220 lb)	Tilt dump type general purpose bucket



SERVICE REFILL CAPACITIES

	liters	US gal	Imp gal
Fuel tank	590.0	155.9	129.8
Engine coolant	45.0	11.9	9.9
Engine oil	50.0	13.2	11.0
Pump drive	1.6	0.4	0.4
Swing mechanism	8.2	4.3	3.6
(each side)			
Travel final device	10.0	5.3	4.4
(each side)			
Hydraulic system	520.0	137.4	114.4
Hydraulic tank	268.0	70.8	59.0



BACKHOE ATTACHMENTS

Boom and arms of all-welded, box-section design. 7.0 m (23'0") boom, 2.9 m (9'6"), 3.4 m (11'2"), 3.9 m (12'10") and 4.9 m (16'1") arms are available. Bucket is of all-welded, high-strength steel structure. Side clearance adjust mechanism provided on the bucket joint bracket.

EX400H-3c/EX400LCH-3c: The EX450H-3c and EX450LCH-3c are heavy-duty type featuring the reinforced H-boom and H-arm, and 1.82 m³ (2.38 yd³; PCSA heaped) rock bucket.




LOADING SHOVEL ATTACHMENTS

Boom and arm are of all-welded, low-stress full-box section design. Efficient, automatic horizontal crowding achieved by one-lever control because the parallel link mechanism keeps the bucket digging angle constant, and the level cylinder circuit maintains the bucket height constant.

BACKHOE EX400-3 / EX400LC-3

DIMENSIONS

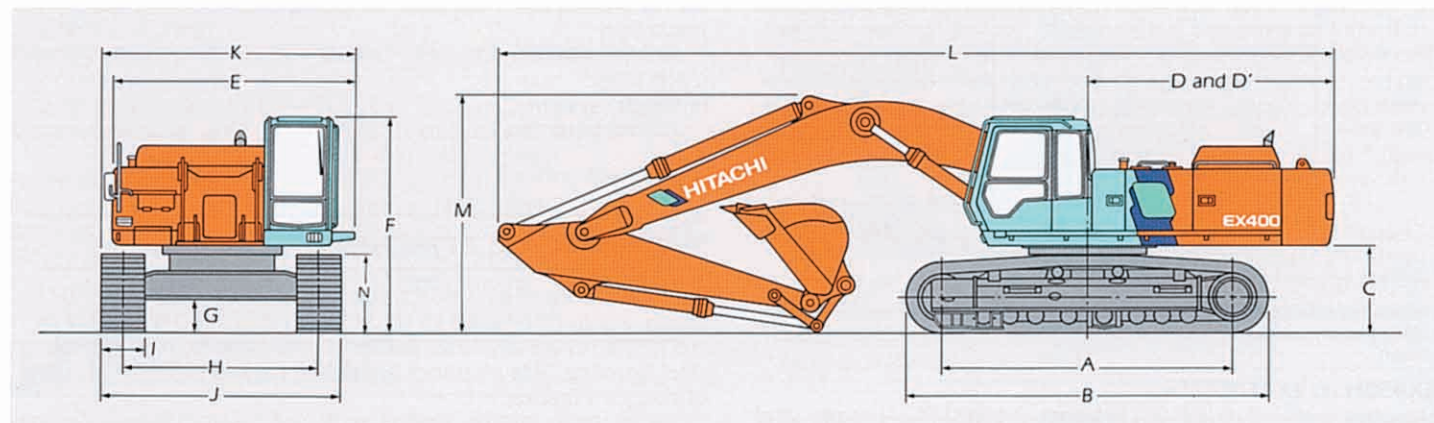


	EX400-3c	EX400LC-3c
A Distance between tumbler	4 050 mm (13'3")	4 470 mm (14'8")
B Undercarriage length	5 050 mm (16'7")	5 470 mm (17'11")
C Counterweight clearance	1 230 mm (4'0")	1 350 mm (4'5")
D Rear-end swing radius		3 470 mm (11'5")
D' Rear-end length		3 450 mm (11'4")
E Overall width of upperstructure		3 530 mm (11'7")
F Overall height of cab	3 090 mm (10'2")	3 210 mm (10'6")
G Min. ground clearance	496 mm (19.5")	735 mm (28.9")
H Track gauge	2 740 mm (9'0")	—
I Track shoe width	—	2 890 mm (9'6")/2 390 mm (7'10")
J Undercarriage width	3 340 mm (10'11")	G 750 mm (30")
K Overall width	3 650 mm (12'0")	3 730 mm (12'3")
L Overall length	11 820 mm (38'9")	11 790 mm (38'8")
M Overall height of boom	3 450 mm (11'4")	3 480 mm (11'5")
N Track height	1 140 mm (3'9")	1 220 mm (4'0")

Notes: 1. Equipped with 3.4 m (11'2") arm.
2. *Excluding track shoe lug.

G: Triple grouser shoe

WORKING RANGES

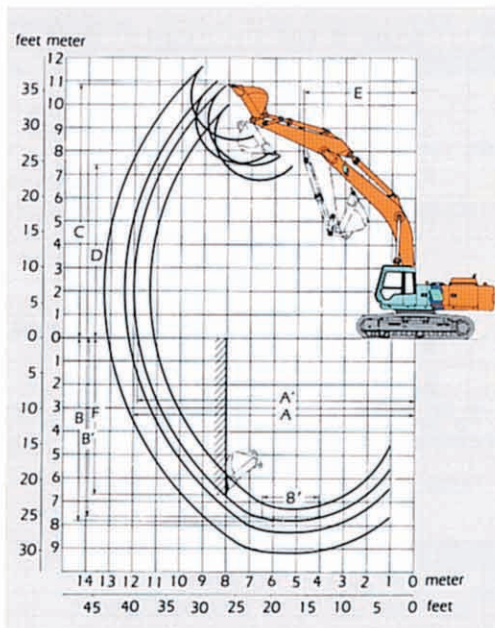


Arm length		2.9 m (9'6")		3.4 m (11'2")		3.9 m (12'10")		4.9 m (16'1")	
Type of undercarriage		EX400-3c	EX400LC-3c	EX400-3c	EX400LC-3c	EX400-3c	EX400LC-3c	EX400-3c	EX400LC-3c
A	Max. digging reach	11 390 mm (37'4")	11 420 mm (37'6")	12 050 mm (39'6")	12 480 mm (40'11")	13 380 mm (43'11")	13 180 mm (43'3")	13 380 mm (43'11")	13 180 mm (43'3")
A'	Max. digging reach (on ground)	11 180 mm (36'8")	11 190 mm (36'9")	11 860 mm (38'11")	11 810 mm (38'9")	12 290 mm (40'4")	12 270 mm (40'3")	13 200 mm (43'4")	13 180 mm (43'3")
B	Max. digging depth	7 390 mm (24'3")	7 300 mm (23'11")	7 890 mm (25'11")	7 760 mm (25'6")	8 390 mm (27'6")	8 260 mm (27'1")	9 240 mm (30'4")	9 110 mm (29'11")
B'	Max. digging depth (B' level)	7 190 mm (23'7")	7 100 mm (23'4")	7 750 mm (25'5")	7 620 mm (25'0")	8 260 mm (27'1")	8 130 mm (26'8")	9 120 mm (29'11")	9 000 mm (29'6")
C	Max. cutting height	10 150 mm (33'4")	10 270 mm (33'8")	10 950 mm (35'11")	11 080 mm (36'4")	11 050 mm (36'3")	11 180 mm (36'8")	11 730 mm (38'6")	11 850 mm (38'11")
D	Max. dumping height	6 910 mm (22'8")	7 000 mm (23'0")	7 540 mm (24'9")	7 660 mm (25'2")	7 660 mm (25'2")	7 780 mm (25'6")	8 640 mm (28'4")	8 770 mm (28'9")
E	Min. swing radius	4 920 mm (16'2")	4 840 mm (15'11")	4 840 mm (15'11")	4 810 mm (15'9")	4 810 mm (15'9")	4 810 mm (15'9")	4 820 mm (15'10")	4 820 mm (15'10")
F	Max. vertical wall	5 460 mm (17'11")	4 780 mm (15'8")	6 780 mm (22'3")	6 660 mm (21'10")	7 170 mm (23'6")	7 040 mm (23'1")	8 580 mm (28'2")	8 450 mm (27'9")
Bucket digging force*	ISO	249 kN (25 400 kgf, 56 000 lbf)	251 kN (25 600 kgf, 56 400 lbf)	251 kN (25 600 kgf, 56 400 lbf)	251 kN (25 600 kgf, 56 400 lbf)	251 kN (25 600 kgf, 56 400 lbf)	251 kN (25 600 kgf, 56 400 lbf)	208 kN (21 200 kgf, 46 700 lbf)	208 kN (21 200 kgf, 46 700 lbf)
	SAE: PCSA	225 kN (22 900 kgf, 50 500 lbf)	229 kN (23 400 kgf, 51 600 lbf)	229 kN (23 400 kgf, 51 600 lbf)	226 kN (23 000 kgf, 50 700 lbf)	226 kN (23 000 kgf, 50 700 lbf)	226 kN (23 000 kgf, 50 700 lbf)	186 kN (19 000 kgf, 41 900 lbf)	186 kN (19 000 kgf, 41 900 lbf)
Arm digging force*	ISO	228 kN (23 200 kgf, 51 200 lbf)	221 kN (22 500 kgf, 49 600 lbf)	194 kN (19 800 kgf, 43 700 lbf)	189 kN (19 300 kgf, 42 500 lbf)	176 kN (17 900 kgf, 39 500 lbf)	172 kN (17 500 kgf, 38 600 lbf)	156 kN (15 900 kgf, 35 100 lbf)	152 kN (15 500 kgf, 34 000 lbf)
	SAE: PCSA	221 kN (22 500 kgf, 49 600 lbf)	221 kN (22 500 kgf, 49 600 lbf)	189 kN (19 300 kgf, 42 500 lbf)	189 kN (19 300 kgf, 42 500 lbf)	172 kN (17 500 kgf, 38 600 lbf)	172 kN (17 500 kgf, 38 600 lbf)	152 kN (15 500 kgf, 34 000 lbf)	152 kN (15 500 kgf, 34 000 lbf)

Excluding track shoe lug.

EX450H-3c / EX450LCH-3c

DIMENSIONS

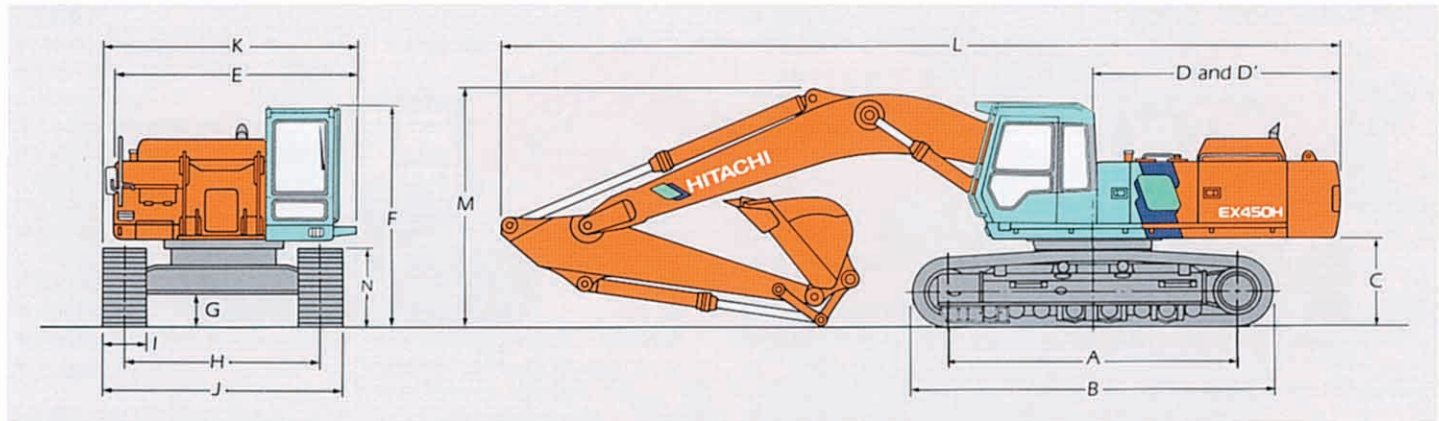


	EX450H-3c	EX450LCH-3c
A Distance between tumblers	4 050 mm (13'3")	4 470 mm (14'8")
B Undercarriage length	5 050 mm (16'7")	5 470 mm (17'11")
*C Counterweight clearance	1 230 mm (4'0")	1 350 mm (4'5")
D Rear-end swing radius		3 470 mm (11'5")
D' Rear-end length		3 450 mm (11'4")
E Overall width of upperstructure		3 530 mm (11'7")
F Overall height of cab	3 210 mm (10'6")	3 330 mm (10'11")
*G Min. ground clearance	496 mm (19.5")	735 mm (28.9")
H Track gauge	2 740 mm (9'0")	—
Extended / Retracted	—	2 890 mm (9'6") / 2 390 mm (7'10")
I Track shoe width		G 600 mm (24")
J Undercarriage width	3 340 mm (10'11")	—
Extended / Retracted	—	3 490 mm (11'5") / 2 990 mm (9'10")
K Overall width	3 650 mm (12'0")	3 650 mm (12'0")
L Overall length	11 820 mm (38'9")	11 790 mm (38'8")
M Overall height of boom	3 450 mm (11'4")	3 480 mm (11'5")
N Track height	1 140 mm (3'9")	1 210 mm (4'0")

Notes: 1. Equipped with 3.4 m (11'2") H-arm and H-boom.
2. *Excluding track shoe lug.

G: Triple grouser shoe

WORKING RANGES

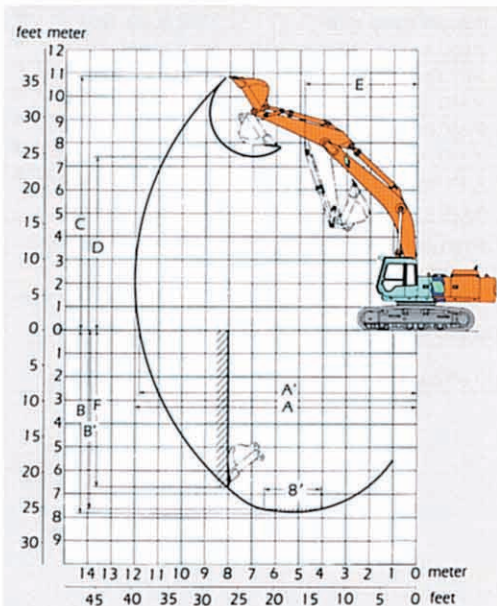


Arm length		3.4 m (11'2") H-arm	
Type of undercarriage		EX450H-3c	EX450LCH-3c
A	Max. digging reach	12 050 mm (39'6")	
A'	Max. digging reach (on ground)	11 860 mm (38'11")	11 810 mm (38'9")
B	Max. digging depth	7 890 mm (25'11")	7 760 mm (25'6")
B'	Max. digging depth (8' level)	7 750 mm (25'5")	7 620 mm (25'0")
C	Max. cutting height	10 950 mm (35'11")	11 080 mm (36'4")
D	Max. dumping height	7 540 mm (24'9")	7 660 mm (25'2")
E	Min. swing radius	4 840 mm (15'11")	
F	Max. vertical wall	6 780 mm (22'3")	6 660 mm (21'10")
Bucket digging force	ISO	261 kN (26 600 kgf, 58 700 lbf)	
	SAE / PCSA	233 kN (23 800 kgf, 52 500 lbf)	
Arm digging force	ISO	196 kN (20 000 kgf, 44 100 lbf)	
	SAE / PCSA	191 kN (19 500 kgf, 42 500 lbf)	

Excluding track shoe lug

LOADING SHOVEL EX400-3c


DIMENSIONS

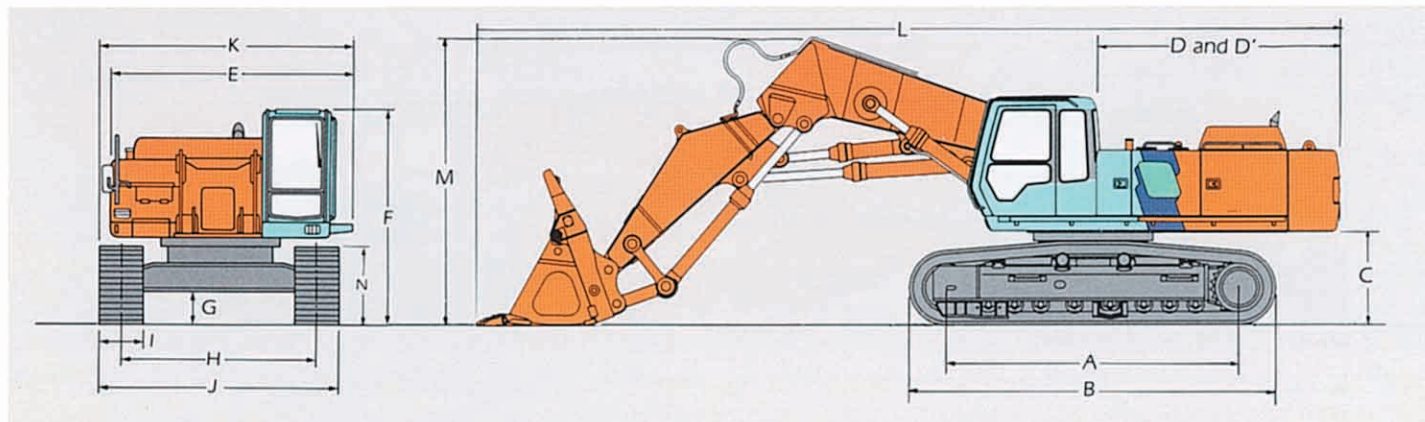

	EX400-3c
A Distance between tumbler	4 050 mm (13'3")
B Undercarriage length	5 050 mm (16'7")
*C Counterweight clearance	1 230 mm (4'0")
D Rear-end swing radius	3 470 mm (11'5")
D' Rear-end length	3 450 mm (11'4")
E Overall width of upperstructure	3 530 mm (11'7")
F Overall height of cab	3 090 mm (10'2")
*G Min. ground clearance	496 mm (19.5")
H Track gauge	2 740 mm (9'0")
I Track shoe width	G 600 mm (24")
J Undercarriage width	3 340 mm (10'11")
Extended / Retracted	—
K Overall width	3 650 mm (12'0")
*L Overall length	11 900 mm (39'1")
M Overall height of boom	4 000 mm (13'1")
N Track height	1 140 mm (3'9")

Note: *Excluding track shoe lug.

WORKING RANGES

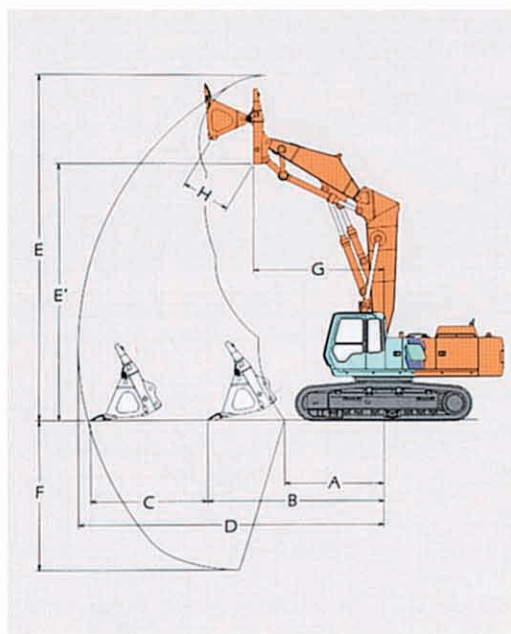

Type of bucket	Bottom dump type	Tilt dump type
A Min. digging distance	2 860 mm (9'5")	2 360 mm (7'9")
B Min. level crowding distance	5 070 mm (16'8")	5 030 mm (16'6")
C Level crowding distance	3 340 mm (10'11")	3 370 mm (11'1")
D Max. digging reach	8 760 mm (28'9")	8 720 mm (28'7")
E Max. cutting height	9 940 mm (32'7")	9 900 mm (32'6")
E' Max. dumping height	7 370 mm (24'2")	4 290 mm (14'1")
F Max. digging depth	4 260 mm (14'0")	4 230 mm (13'10")
G Working radius at max. dumping height	3 760 mm (12'4")	4 460 mm (14'8")
H Max. bucket opening width	1 390 mm (4'7")	—
Crowding force	296 kN (30 200 kgf, 66 600 lbf)	305 kN (31 100 kgf, 68 600 lbf)
Breakout force	271 kN (27 600 kgf, 60 900 lbf)	259 kN (26 400 kgf, 58 200 lbf)



STANDARD EQUIPMENT

Standard equipment may vary by country, so please consult your Hitachi dealer for details.

ENGINE

- 40 A alternator
- Dry-type air filter with evacuator valve
- Cartridge-type engine oil filter
- Cartridge type engine oil bypass filter
- Cartridge type fuel filter
- Radiator and oil cooler with dust protective net
- Radiator reserve tank
- Fan guard
- Isolation-mounted engine
- Auto-idling system

HYDRAULIC SYSTEM

- ETS
- E-P control system (power mode selector)
- OHS
- FPS
- Hydraulic warm-up control system for hydraulic oil
- Quick warm-up system for pilot circuit
- Shockless valve in pilot circuit
- Swing cushion valve in swing circuit
- Accumulator in pilot circuit
- Control valve with main relief valve
- Extra port for control valve
- Suction filter

- Full-flow filter
- Pilot filter

CAB

All-weather sound-suppressed steel cab equipped with reinforced, tinted (bronze color) glass windows, openable front windows-upper, with assist spring, and lower and both side windows with intermittent windshield wipers, front window washer, curved rear window, side mirror, adjustable suspension seat with armrests, footrest, electric double horn, auto-tuning radio with digital clock, or without digital clock in North America, auto-idle switch, seat belt, cigarette lighter, ashtray, parcel pocket, rear tray, floor mat, and pilot control shut-off lever.

MONITOR SYSTEM

- Meters:
Hourmeter, engine coolant temperature gauge and fuel meter.
- Warning lamps:
Alternator charge, engine oil pressure, engine overheat, air cleaner clog and minimum fuel level.

- Pilot lamps:
Engine preheat, engine oil level, engine coolant level and hydraulic oil level.
- Alarm buzzers:
Engine oil pressure and engine overheat

LIGHTS

- 3 working lights and 1 cab light

UPPERSTRUCTURE

- Undercover
- 9 300 kg (20 500 lb) counterweight
- Fuel level gauge
- Hydraulic oil level gauge
- Tool box
- Utility space
- Rearview mirror
- Swing parking brake

UNDERCARRIAGE

- Travel parking brake
- Travel motor covers
- Track guards and hydraulic track adjuster
- Bolt-on sprocket
- Upper rollers and lower rollers
- Reinforced track links with pin seals
- 600 mm (24") triple grouser shoes
- Track guard

FRONT ATTACHMENTS

- Bucket clearance adjust mechanism
- Monolithically cast bucket link A
- Centralized lubrication system
- Dirt seals on all bucket pins
- 3.4 m (11'2") arm
- 1.82 m³ (2.38 yd³: PCSA heaped) bucket

MISCELLANEOUS

- Standard tool kit
- Lockable machine covers
- Fuel filling cap
- Skid-resistant tapes, left sidewalk and handrails.

EX450H-3c/EX450LCH-3c (Heavy-duty version)

- Headguard-integrated cab (with pressurizer kit)
- H-boom 7.0 m (23'0")
- H-arm 3.4 m (11'2")
- 1.82 m³ (2.38 yd³: PCSA heaped) rock bucket
- Reinforced undercover for upperstructure



OPTIONAL EQUIPMENT


Optional equipment may vary by country, so please consult your Hitachi dealer for details.

- 750 mm (30") triple grouser shoes
- 900 mm (35") triple grouser shoes
- Track guard for H (for STD & LC)
- Full track guard
- Air conditioner
- Hot & cool box
- Hose rupture valve

- Swing alarm with lamps
- Travel alarm with cancel switch
- Ladder
- Right-side walkway
- Electric fuel refilling pump
- Electric grease gun with hose reel

- Headguard-integrated cab (with pressurizer kit)
- H-boom 7.0 m (23'0")
- H-arm 3.4 m (11'2")
- 1.82 m³ (2.38 yd³: PCSA heaped) rock bucket
- Reinforced undercover for upperstructure

LIFTING CAPACITIES



A: Load radius
B: Load point height
C: Lifting capacity

METRIC MEASURE

EX400-3C

Rating over-side or 360 degrees Rating over-front Unit: 1 000 kg (1 000 lb)

Conditions	Load point height m (ft in)	Load radius																m (ft in)		At max. reach		
		4 (13'1")		5 (16'5")		6 (19'8")		7 (23'0")		8 (26'3")		9 (29'6")		10 (32'10")		11 (36'1")		12 (39'4")		@ (ft in)		
																						
Boom 7.0 m (23'0") Arm 2.9 m (9'6") Bucket PCSA: 2.07 m³ (2.71 yd³) CECE: 1.80 m³ Shoes 600 mm (24")	8 (26'3")																			5.49 (12.1)	*5.98 (13.2)	9.21 (30'3")
																				5.49 (12.1)	*4.14 (9.1)	
	7 (23'0")									6.95 (15.3)	*8.11 (17.9)									4.71 (10.4)	*5.96 (13.1)	9.82 (32'2")
										6.95 (15.3)	*8.69 (19.2)									4.71 (10.4)	*4.08 (9.0)	
	6 (19'8")							*8.75 (19.3)	*8.75 (19.3)	6.86 (15.1)	*8.23 (18.1)									4.18 (9.2)	*6.01 (13.3)	10.27 (33'8")
								8.84 (19.5)	*9.36 (20.6)	6.86 (15.1)	*8.82 (19.4)									4.18 (9.2)	*4.07 (9.0)	
	4 (13'1")			14.07 (31.0)	*14.51 (32.0)	10.53 (23.2)	*11.78 (26.0)	8.15 (18.0)	*10.14 (22.4)	6.44 (14.2)	*9.05 (19.9)	5.14 (11.3)	8.19 (18.1)							3.57 (7.9)	*5.90 (13.0)	10.79 (35'5")
				14.07 (31.0)	*15.47 (34.1)	10.53 (23.2)	*12.59 (27.8)	8.15 (18.0)	*10.85 (23.9)	6.44 (14.2)	*9.70 (21.4)	5.14 (11.3)	8.19 (18.1)							3.57 (7.9)	*4.19 (9.2)	
	2 (6'7")							9.33 (20.6)	*14.20 (31.3)	7.37 (16.3)	*11.72 (25.8)	5.92 (13.1)	9.56 (21.1)	4.81 (10.6)	7.83 (17.3)					3.35 (7.4)	*5.64 (12.4)	10.86 (35'7")
								9.33 (20.6)	*15.13 (33.3)	7.37 (16.3)	11.90 (26.2)	5.92 (13.1)	9.56 (21.1)	4.81 (10.6)	7.83 (17.3)					3.05 (6.7)	*4.52 (10.0)	
	0 (Ground)			11.57 (25.5)	*16.17 (35.6)	8.70 (19.2)	14.56 (32.1)	6.86 (15.1)	11.33 (25.0)	5.43 (12.0)	9.14 (20.1)	4.54 (10.0)	7.54 (16.6)							3.47 (7.6)	5.87 (12.9)	10.49 (34'5")
			11.57 (25.5)	*17.11 (37.7)	8.70 (19.2)	14.56 (32.1)	6.86 (15.1)	11.33 (25.0)	5.43 (12.0)	9.14 (20.1)	4.54 (10.0)	7.54 (16.6)							3.47 (7.6)	5.87 (12.9)		
-2 (-6'7")	*17.27 (38.1)	*17.27 (38.1)	11.61 (25.6)	*16.98 (37.4)	8.57 (18.9)	14.41 (31.8)	6.69 (14.7)	11.14 (24.6)	5.39 (11.9)	8.98 (19.8)	4.45 (9.8)	7.44 (16.4)							4.06 (8.9)	6.77 (14.9)	9.63 (31'7")	
	17.33 (38.2)	*18.27 (40.3)	11.61 (25.6)	*18.16 (40.0)	8.57 (18.9)	14.41 (31.8)	6.69 (14.7)	11.14 (24.6)	5.39 (11.9)	8.98 (19.8)	4.45 (9.8)	7.44 (16.4)							4.06 (8.9)	6.77 (14.9)		
-4 (-13'1")	*15.86 (35.0)	*15.86 (35.0)	11.91 (26.3)	*14.24 (31.4)	8.76 (19.3)	*12.38 (27.3)	6.82 (15.0)	*10.57 (23.3)	5.53 (12.2)	*8.79 (19.4)												
	*17.01 (37.5)	*17.01 (37.5)	11.91 (26.3)	*15.27 (33.7)	8.76 (19.3)	*13.29 (29.3)	6.82 (15.0)	11.29 (24.9)	5.53 (12.2)	9.13 (20.1)												
-6 (-19'8")						*7.50 (16.5)	*7.50 (16.5)															
						*8.13 (17.9)	*8.13 (17.9)															
Boom 7.0 m (23'0") Arm 3.4 m (11'2") Bucket PCSA: 1.82 m³ (2.38 yd³) CECE: 1.60 m³ Shoes 600 mm (24")	8 (26'3")									*6.84 (15.1)	*6.84 (15.1)									*3.86 (8.5)	*3.86 (8.5)	10.01 (32'10")
										7.19 (15.8)	*7.28 (16.0)									*4.14 (9.1)	*4.14 (9.1)	
	7 (23'0")									7.19 (15.8)	*7.59 (16.7)	5.59 (12.3)	*5.40 (11.9)							*3.80 (8.4)	*3.80 (8.4)	10.56 (34'8")
										7.19 (15.8)	*8.13 (17.9)	5.59 (12.3)	*5.76 (12.7)							*4.08 (9.0)	*4.08 (9.0)	
	6 (19'8")									7.08 (15.6)	*7.79 (17.2)	5.57 (12.3)	*7.52 (16.6)							3.72 (8.2)	*3.79 (8.4)	10.97 (36'0")
										7.08 (15.6)	*8.35 (18.4)	5.57 (12.3)	*8.07 (17.8)							3.72 (8.2)	*4.07 (9.0)	
	4 (13'1")			*13.43 (29.6)	*13.43 (29.6)	10.91 (24.1)	*11.15 (24.6)	8.41 (18.5)	*9.70 (21.4)	6.64 (14.6)	*8.72 (19.2)	5.32 (11.7)	*8.03 (17.7)	4.26 (9.4)	6.86 (15.1)					3.23 (7.1)	*3.90 (8.6)	11.45 (37'7")
				*14.31 (31.5)	*14.31 (31.5)	10.91 (24.1)	*11.90 (26.2)	8.41 (18.5)	*10.38 (22.9)	6.64 (14.6)	*9.35 (20.6)	5.32 (11.7)	8.37 (18.5)	4.26 (9.4)	6.86 (15.1)					3.23 (7.1)	*4.19 (9.2)	
	2 (6'7")			12.65 (27.9)	*17.64 (38.9)	9.68 (21.3)	*13.77 (30.4)	7.62 (16.8)	*11.43 (25.2)	6.11 (13.5)	9.75 (21.5)	4.96 (10.9)	7.99 (17.6)	4.04 (8.9)	6.63 (14.6)					3.05 (6.7)	*4.21 (9.2)	11.52 (37'10")
				12.65 (27.9)	*18.81 (41.5)	9.68 (21.3)	*14.71 (32.4)	7.62 (16.8)	12.17 (26.8)	6.11 (13.5)	9.75 (21.5)	4.96 (10.9)	7.99 (17.6)	4.04 (8.9)	6.63 (14.6)					3.05 (6.7)	*4.52 (10.0)	
	0 (Ground)			11.79 (26.0)	*16.72 (36.9)	8.92 (19.7)	14.80 (32.6)	7.04 (15.5)	11.52 (25.4)	5.68 (12.5)	9.49 (20.9)	4.65 (10.3)	7.66 (16.9)	3.84 (8.5)	6.41 (14.1)					3.15 (6.9)	*4.77 (10.5)	11.18 (36'8")
			11.79 (26.0)	*17.69 (39.0)	8.92 (19.7)	14.80 (32.6)	7.04 (15.5)	11.52 (25.4)	5.68 (12.5)	9.49 (20.9)	4.65 (10.3)	7.66 (16.9)	3.84 (8.5)	6.41 (14.1)					3.15 (6.9)	*5.10 (11.2)		
-2 (-6'7")	*14.7 (32.5)	*14.7 (32.5)	11.65 (25.7)	*17.89 (39.4)	8.68 (19.1)	14.52 (32.0)	6.79 (15.0)	11.24 (24.8)	5.47 (12.1)	9.06 (20.0)	4.50 (9.9)	7.50 (16.5)	6.34 (14.0)						3.61 (8.0)	*5.74 (12.7)	10.39 (34'1")	
	*15.6 (34.4)	*15.6 (34.4)	11.65 (25.7)	*19.11 (42.1)	8.68 (19.1)	14.52 (32.0)	6.79 (15.0)	11.24 (24.8)	5.47 (12.1)	9.06 (20.0)	4.50 (9.9)	7.50 (16.5)	6.34 (14.0)						3.61 (8.0)	6.04 (13.3)		
-4 (-13'1")	17.6 (38.9)	*17.9 (39.4)	11.90 (26.2)	*15.49 (34.2)	8.78 (19.4)	*13.25 (29.2)	6.84 (15.1)	*11.28 (24.9)	5.52 (12.2)	9.11 (20.1)	4.60 (10.1)	7.60 (16.8)										
	17.6 (38.9)	19.1 (42.1)	11.90 (26.2)	*16.58 (36.6)	8.78 (19.4)	*14.20 (31.3)	6.84 (15.1)	11.30 (24.9)	5.52 (12.2)	9.11 (20.1)	4.60 (10.1)	7.60 (16.8)										
-6 (-19'8")	*12.2 (27.0)	*12.2 (27.0)	*10.88 (24.0)	*10.88 (24.0)	9.23 (20.3)	*9.30 (20.5)	7.26 (16.0)	*7.45 (16.4)														
	*13.2 (29.1)	*13.2 (29.1)	*11.72 (25.8)	*11.72 (25.8)	9.23 (20.3)	*10.03 (22.1)	7.26 (16.0)	*8.07 (17.8)														

with heavy-lifting system

- Notes:
- Ratings are based on SAE J1097.
 - Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 - The load point is a hook (not standard equipment) loaded on the back of the bucket.
 - * Indicates load limited by hydraulic capacity.

METRIC MEASURE

EX400-3C



Rating over-side or 360 degrees



Rating over-front

Unit: 1 000 kg (1 000 lb)

Conditions	Load point height m (ft in)	Load radius																m (ft in)		At max. reach			
		4 (13'1")		5 (16'5")		6 (19'8")		7 (23'0")		8 (26'3")		9 (29'6")		10 (32'10")		11 (36'1")		12 (39'4")				@ (ft in)	
																							
Boom 7.0 m (23'0") Arm 3.9 m (12'10") Bucket PCSA: 1.60 m ³ (2.09 yd ³) CECE: 1.40 m ³ Shoes 600 mm (24")	8 (26'3")																			*3.21 (7.1)	*3.21 (7.1)	10.51 (34'6")	
	7 (23'0")																				*3.46 (7.6)	*3.46 (7.6)	
																					*3.16 (7.0)	*3.16 (7.0)	11.03 (36'2")
	6 (19'8")																				*3.41 (7.5)	*3.41 (7.5)	
																					*3.16 (7.0)	*3.16 (7.0)	11.43 (37'6")
																					*3.41 (7.5)	*3.41 (7.5)	
	4 (13'1")																				3.00 (6.6)	*3.27 (7.2)	11.89 (39'0")
																					3.00 (6.6)	*3.53 (7.8)	
	2 (6'7")																				2.83 (6.2)	*3.55 (7.8)	11.95 (39'2")
																					2.83 (6.2)	*3.82 (8.4)	
	0 (Ground)																				2.90 (6.4)	*4.03 (8.9)	11.62 (38'2")
																					2.90 (6.4)	*4.33 (9.5)	
-2 (-6'7")																				3.28 (7.2)	*4.88 (10.7)	10.87 (35'8")	
																				3.28 (7.2)	*5.21 (11.5)		
-4 (-13'1")																				4.23 (9.3)	*6.47 (14.3)	9.57 (31'5")	
																				4.23 (9.3)	*6.88 (15.2)		
-6 (-19'8")																							

Boom 7.0 m (23'0") Arm 4.9 m (16'1") Bucket PCSA: 1.36 m ³ (1.78 yd ³) CECE: 1.20 m ³ Shoes 600 mm (24")	8 (26'3")																	*3.11 (6.9)	*3.11 (6.9)	11.58 (38'0")
	7 (23'0")																	*3.34 (7.4)	*3.34 (7.4)	12.04 (39'6")
	6 (19'8")																	*3.05 (6.7)	*3.05 (6.7)	12.40 (40'8")
	4 (13'1")																	*3.29 (7.2)	*3.29 (7.2)	12.82 (42'1")
	2 (6'7")																	*3.03 (6.7)	*3.03 (6.7)	12.89 (42'4")
	0 (Ground)																	*3.03 (6.7)	*3.03 (6.7)	12.61 (41'4")
	-2 (-6'7")																	*3.03 (6.7)	*3.03 (6.7)	11.95 (39'3")
	-4 (-13'1")																	*3.03 (6.7)	*3.03 (6.7)	10.84 (35'7")
	-6 (-19'8")																	*3.03 (6.7)	*3.03 (6.7)	9.08 (29'9")
	-8 (-26'3")																	*3.03 (6.7)	*3.03 (6.7)	
	-10 (-32'10")																	*3.03 (6.7)	*3.03 (6.7)	
	-12 (-39'4")																	*3.03 (6.7)	*3.03 (6.7)	


with heavy-lifting system

Notes: 1. Ratings are based on SAE J1097.

2. Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook (not standard equipment) loaded on the back of the bucket.

4. *Indicates load limited by hydraulic capacity.



A: Load radius
B: Load point height
C: Lifting capacity

METRIC MEASURE

EX450H-3c



Rating over-side or 360 degrees



Rating over-front

Unit: 1 000 kg (1 000 lb)

Conditions	Load point height m (ft in)	Load radius																m (ft in)		At max. reach		
		4 (13'1")		5 (16'5")		6 (19'8")		7 (23'0")		8 (26'3")		9 (29'6")		10 (32'10")		11 (36'1")		12 (39'4")				@ (ft in)
Boom 7.0 m (23'0") H-boom Arm 3.4 m (11'2") H-arm Bucket PCSA: 1.82 m³ (2.38 yd³) CECE: 1.60 m³ Rock bucket Shoes 600 mm (24")	8 (26'3")																					10.13 (33'3")
	7 (23'0")																					10.67 (35'0")
	6 (19'8")																					11.08 (36'4")
	4 (13'1")																					11.54 (37'10")
	2 (6'7")																					11.59 (38'0")
	0 (Ground)																					11.23 (36'10")
-2 (-6'7")																					10.42 (34'2")	
-4 (-13'1")																						
-6 (-19'8")																						

with heavy-lifting system

Notes: 1. Ratings are based on SAE J11077.

2. Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook (not standard equipment) loaded on the back of the bucket.

4. *Indicates load limited by hydraulic capacity.

ENGLISH MEASURE

EX400LC-3C



Rating over-side or 360 degrees



Rating over-front

Unit: 1 000 lb (1 000 kg)

Conditions	Load point height	Load radius										At max. reach				
		10 ft (3.05 m)		15 ft (4.57 m)		20 ft (6.10 m)		25 ft (7.62 m)		30 ft (9.14 m)					35 ft (10.67 m)	
																@ ft in (m)
Boom 23'0" (7.0 m) Arm 9'6" (2.9 m) Bucket PCSA: 2.98 yd ³ (2.28 m ³) Shoes 30" (750 mm)	25 ft (7.62 m)							*17.7 (8.0)	*17.7 (8.0)					*11.8 (5.4)	*11.8 (5.4)	31'7" (9.6)
								*19.0 (8.6)	*19.0 (8.6)					*12.6 (5.7)	*12.6 (5.7)	
	20 ft (6.10 m)							*18.2 (8.3)	*18.2 (8.3)					10.5 (4.8)	*11.9 (5.4)	34'0" (10.4)
								18.9 (8.6)	*19.6 (8.9)					10.5 (4.8)	*12.7 (5.8)	
	15 ft (4.57 m)			*32.8 (14.9)	*32.8 (14.9)	*24.1 (10.9)	*24.1 (10.9)	18.1 (8.2)	*19.9 (9.0)	12.8 (5.8)	*17.6 (8.0)			9.4 (4.2)	*12.4 (5.6)	35'5" (10.8)
				*34.9 (15.8)	*34.9 (15.8)	*25.7 (11.7)	*25.7 (11.7)	18.1 (8.2)	*21.0 (9.7)	12.8 (5.8)	*18.9 (8.6)			9.4 (4.2)	*13.2 (6.0)	
	10 ft (3.05 m)					24.4 (11.1)	*28.3 (12.8)	17.0 (7.7)	*21.9 (9.9)	12.3 (5.6)	*18.5 (8.4)			8.8 (4.0)	*13.2 (6.0)	36'0" (11.0)
						24.4 (11.1)	*30.2 (13.7)	17.0 (7.7)	*23.6 (10.7)	12.3 (5.6)	*19.9 (9.0)			8.8 (4.0)	*14.0 (6.4)	
	5 ft (1.52 m)					22.7 (10.3)	*31.4 (14.3)	16.1 (7.3)	*23.8 (10.8)	11.8 (5.4)	*19.4 (8.8)			8.7 (3.9)	*14.4 (6.5)	35'8" (10.9)
						22.7 (10.3)	*33.6 (15.2)	16.1 (7.3)	*25.5 (11.6)	11.8 (5.4)	20.8 (9.5)			8.8 (3.9)	*15.3 (6.9)	
	0 (Ground)					21.9 (9.9)	*32.5 (14.7)	15.4 (7.0)	*24.8 (11.2)	11.4 (5.2)	*19.9 (9.0)			9.0 (4.1)	*16.2 (7.4)	34'7" (10.5)
						21.9 (9.9)	*34.8 (15.8)	15.4 (7.0)	*26.6 (12.1)	11.4 (5.2)	20.4 (9.3)			9.0 (4.1)	*17.2 (7.8)	
- 5 ft (- 1.52 m)			35.1 (15.9)	*40.1 (18.2)	21.6 (9.8)	*31.6 (14.3)	15.1 (6.9)	*24.5 (11.1)	11.3 (5.1)	*19.3 (8.8)			10.1 (4.6)	*16.3 (7.4)	32'6" (9.9)	
			35.1 (15.9)	*42.9 (19.5)	21.6 (9.8)	*33.8 (15.3)	15.1 (6.9)	*36.3 (16.5)	11.3 (5.1)	20.2 (9.2)			10.1 (4.6)	*17.6 (8.0)		
- 10 ft (- 3.05 m)		*41.5 (18.8)	*41.5 (18.8)	35.5 (16.1)	*35.9 (16.3)	21.8 (9.9)	*28.9 (13.1)	15.2 (6.9)	*22.6 (10.3)							
		*44.5 (20.2)	*44.5 (20.2)	35.5 (16.1)	*38.4 (17.4)	21.8 (9.9)	*31.0 (14.1)	15.2 (6.9)	*24.3 (11.0)							
- 15 ft (- 4.57 m)				*29.2 (13.3)	*29.2 (13.3)	22.3 (10.1)	*23.9 (10.8)	15.7 (7.1)	*17.8 (8.1)							
				*31.4 (14.3)	*31.4 (14.3)	22.3 (10.1)	*25.7 (11.7)	15.7 (7.1)	*19.3 (8.7)							

Boom 23'0" (7.0 m) Arm 11'2" (3.4 m) Bucket PCSA: 2.71 yd ³ (2.07 m ³) Shoes 30" (750 mm)	25 ft (7.62 m)													*8.3 (3.8)	*8.4 (3.8)	33'10" (10.3)
														*8.9 (4.0)	*8.9 (4.0)	
	20 ft (6.10 m)							*17.4 (7.9)	*17.4 (7.9)	13.7 (6.2)	*16.4 (7.4)			*8.2 (3.7)	*8.2 (3.7)	36'0" (11.0)
								*18.6 (8.5)	*18.6 (8.5)	13.7 (6.2)	*17.6 (8.0)			*8.8 (4.0)	*8.8 (4.0)	
	15 ft (4.57 m)					*22.8 (10.4)	*22.8 (10.4)	18.7 (8.5)	*19.1 (8.7)	13.4 (6.1)	*17.1 (7.7)			*8.4 (3.8)	*8.4 (3.8)	37'4" (11.4)
						*24.4 (11.1)	*24.4 (11.1)	18.7 (8.5)	*20.6 (9.3)	13.4 (6.1)	*18.3 (8.3)			8.7 (3.9)	*9.0 (4.1)	
	10 ft (3.05 m)					25.4 (11.5)	*27.2 (12.3)	17.7 (8.0)	*21.5 (9.7)	12.8 (5.8)	*18.2 (8.3)			8.2 (3.7)	*8.8 (4.0)	37'10" (11.5)
						25.4 (11.5)	*29.1 (13.2)	17.7 (8.0)	*23.0 (10.4)	12.8 (5.8)	*19.6 (8.9)			8.2 (3.7)	*9.4 (4.3)	
	5 ft (1.52 m)					23.6 (10.7)	*30.9 (14.0)	16.7 (7.6)	*23.6 (10.7)	12.3 (5.6)	*19.3 (8.8)			8.1 (3.7)	*9.5 (4.3)	37'7" (11.1)
						23.6 (10.7)	*33.0 (15.0)	16.7 (7.6)	*25.3 (11.5)	12.3 (5.6)	*20.8 (9.4)			8.1 (3.7)	*10.1 (4.6)	
	0 (Ground)			*23.0 (10.4)	*23.0 (10.4)	22.5 (10.2)	*32.7 (14.8)	15.9 (7.2)	*24.9 (11.3)	11.8 (5.4)	*20.1 (9.1)			8.4 (3.8)	*10.5 (4.8)	36'7" (11.1)
				*24.4 (11.1)	*24.4 (11.1)	22.5 (10.2)	*35.0 (15.9)	15.9 (7.2)	*26.7 (12.1)	11.8 (5.4)	20.8 (9.4)			8.4 (3.8)	*11.2 (5.1)	

with heavy-lifting system

- Notes: 1. Ratings are based on SAE J1097.
 2. Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook (not standard equipment) loaded on the back of the bucket.
 4. *Indicates load limited by hydraulic capacity.

ENGLISH MEASURE

EX400LC-3c



Rating over-side or 360 degrees



Rating over-front

Unit: 1 000 lb (1 000 kg)

Conditions	Load point height	Load radius												At max. reach		
		10 ft (3.05 m)		15 ft (4.57 m)		20 ft (6.10 m)		25 ft (7.62 m)		30 ft (9.14 m)		35 ft (10.67 m)				@ ft in (m)
																
Boom 23'0" (7.0 m) Arm 12'10" (3.9 m) Bucket PCSA: 2.38 yd ³ (1.82 m ³) Shoes 30" (750 mm)	25 ft (7.62 m)									*10.1 (4.6)	*10.1 (4.6)			*6.8 (3.1)	*6.8 (3.1)	35'5" (10.8)
										*10.8 (4.9)	*10.8 (4.9)			*7.4 (3.4)	*7.4 (3.4)	
	20 ft (6.10 m)									14.0 (6.4)	*15.3 (6.9)			*6.8 (3.1)	*6.8 (3.1)	37'6" (11.4)
										14.0 (6.4)	*16.4 (7.5)			*7.4 (3.4)	*7.4 (3.4)	
	15 ft (4.57 m)							*18.0 (8.2)	*18.0 (8.2)	13.6 (6.2)	*16.2 (7.3)	9.0 (4.1)	9.0 (4.1)	*7.0 (3.2)	*7.0 (3.2)	38'9" (11.8)
								*19.3 (8.6)	*19.3 (8.8)	13.6 (6.2)	*17.4 (7.9)	9.0 (4.1)	9.7 (4.4)	*7.5 (3.4)	*7.5 (3.4)	
	10 ft (3.05 m)			*36.3 (16.5)	*36.3 (16.5)	*25.9 (11.7)	*25.9 (11.7)	17.9 (8.1)	*20.4 (9.3)	13.0 (5.9)	*17.4 (7.9)	9.5 (4.3)	13.9 (6.3)	*7.3 (3.3)	*7.3 (3.3)	39'3" (12.0)
				*38.7 (17.5)	*38.7 (17.5)	25.9 (11.8)	*27.3 (12.4)	17.9 (8.1)	*21.8 (9.9)	13.0 (5.9)	*18.7 (8.5)	9.5 (4.3)	14.8 (6.7)	*7.6 (3.5)	*7.9 (3.6)	
	5 ft (1.52 m)			*32.1 (14.6)	*32.1 (14.6)	23.9 (10.9)	*29.7 (13.5)	16.8 (7.6)	*22.8 (10.3)	12.3 (5.6)	*18.7 (8.5)	9.2 (4.2)	16.1 (7.3)	*7.5 (3.4)	*7.9 (3.6)	39'0" (11.9)
				*34.0 (15.4)	*34.0 (15.4)	23.9 (10.9)	*31.7 (14.4)	16.8 (7.6)	*24.4 (11.1)	12.3 (5.6)	*20.2 (9.1)	9.2 (4.2)	16.4 (7.4)	*7.5 (3.4)	*8.5 (3.9)	
	0 (ground)			*29.7 (13.5)	*29.7 (13.5)	22.6 (10.3)	*32.2 (14.6)	16.0 (7.2)	*24.4 (11.1)	11.8 (5.4)	*19.7 (8.9)	8.9 (4.1)	16.1 (7.3)	*7.8 (3.5)	*8.8 (4.0)	38'0" (11.6)
				*31.5 (14.3)	*31.5 (14.3)	22.6 (10.3)	*34.4 (15.6)	16.0 (7.2)	*26.2 (11.9)	11.8 (5.4)	*20.8 (9.4)	8.9 (4.1)	16.1 (7.3)	*7.8 (3.5)	*9.5 (4.3)	
-5 ft (-1.52 m)			*17.6 (8.0)	*17.6 (8.0)	35.0 (15.9)	*40.2 (18.3)	22.0 (10.0)	*32.7 (14.8)	15.5 (7.0)	*25.0 (11.4)	11.5 (5.2)	*20.0 (9.1)		8.4 (3.8)	*10.2 (4.6)	36'3" (11.0)
			*18.7 (8.5)	*18.7 (8.5)	35.0 (15.9)	*42.5 (19.3)	22.0 (10.0)	*34.8 (15.8)	15.5 (7.0)	*26.9 (12.2)	11.5 (5.2)	*20.4 (9.3)		8.4 (3.8)	*10.9 (4.9)	
-10 ft (-3.05 m)			*33.6 (15.2)	*33.6 (15.2)	35.2 (16.0)	*41.2 (18.7)	21.8 (9.9)	*31.3 (14.2)	15.3 (6.9)	*24.3 (11.0)	11.4 (5.2)	*19.0 (8.6)		9.8 (4.5)	*12.3 (5.6)	33'5" (10.2)
			*35.5 (16.1)	*35.5 (16.1)	35.2 (16.0)	*44.0 (20.0)	21.8 (9.9)	*33.5 (15.2)	15.3 (6.9)	*26.1 (11.8)	11.4 (5.2)	*20.3 (9.2)		9.8 (4.5)	*13.2 (6.0)	
-15 ft (-4.57 m)			*45.9 (20.8)	*45.9 (20.8)	35.8 (16.2)	*36.0 (16.3)	22.1 (10.0)	*28.0 (12.7)	15.5 (7.0)	*21.7 (9.8)				12.6 (5.7)	*13.6 (6.2)	29'4" (8.9)
			*49.1 (22.3)	*49.1 (22.3)	35.8 (16.2)	*38.5 (17.5)	22.1 (10.0)	*30.0 (13.6)	15.5 (7.0)	*23.3 (10.6)				12.6 (5.7)	*14.8 (6.7)	
-20 ft (-6.10 m)					*27.5 (12.5)	*27.5 (12.5)	21.6 (9.8)	*21.6 (9.8)	*15.2 (6.9)	*15.2 (6.9)						
					*29.5 (13.4)	*29.5 (13.4)	22.8 (10.4)	*23.2 (10.5)	16.2 (7.3)	*16.5 (7.5)						

Boom 23'0" (7.0 m) Arm 16'1" (4.9 m) Bucket PCSA: 1.78 yd ³ (1.36 m ³) Shoes 30" (750 mm)	30 ft (9.14 m)													*7.1 (3.2)	*7.1 (3.2)	36'0" (11.0)
														*7.6 (3.5)	*7.6 (3.5)	
	25 ft (7.62 m)													*6.8 (3.1)	*6.8 (3.1)	38'10" (11.8)
														*7.3 (3.3)	*7.3 (3.3)	
	20 ft (6.10 m)									*14.4 (6.5)	*14.4 (6.5)	11.5 (5.2)	*12.4 (5.6)	*6.7 (3.0)	*6.7 (3.0)	40'9" (12.4)
										*15.4 (7.0)	*15.4 (7.0)	11.5 (5.2)	*13.2 (6.2)	*7.2 (3.3)	*7.2 (3.3)	
	15 ft (4.57 m)									15.1 (6.8)	*15.5 (7.0)	11.2 (5.1)	*14.6 (6.6)	*6.8 (3.1)	*6.8 (3.1)	41'10" (12.8)
										15.1 (6.8)	*16.6 (7.5)	11.2 (5.1)	*15.7 (7.1)	*7.3 (3.3)	*7.3 (3.3)	
	10 ft (3.05 m)							*19.4 (8.8)	*19.4 (8.8)	14.4 (6.5)	*17.0 (7.7)	10.9 (4.9)	*15.5 (7.0)	*7.0 (3.2)	*7.0 (3.2)	42'4" (12.8)
								19.6 (8.9)	*20.7 (9.4)	14.4 (6.5)	*18.2 (8.3)	10.9 (4.9)	*16.6 (7.5)	*7.5 (3.4)	*7.5 (3.4)	
	5 ft (1.52 m)			*39.8 (18.1)	*39.8 (18.1)	26.0 (11.8)	*28.1 (12.7)	18.4 (8.3)	*22.1 (10.0)	13.7 (6.2)	*18.6 (8.5)	10.4 (4.7)	*16.4 (7.4)	*7.4 (3.3)	*7.4 (3.3)	42'2" (12.8)
				40.3 (18.3)	*42.4 (19.2)	26.0 (11.8)	*29.9 (13.6)	18.4 (8.3)	*23.7 (10.7)	13.7 (6.2)	*20.0 (9.1)	10.4 (4.7)	*17.6 (8.0)	*7.4 (3.3)	*7.9 (3.6)	
	0 (Ground)			37.3 (16.9)	*38.8 (17.6)	24.2 (11.0)	*31.7 (14.4)	17.3 (7.9)	*24.4 (11.1)	13.0 (5.9)	*20.0 (9.1)	10.0 (4.6)	*17.1 (7.8)	*7.5 (3.4)	*8.0 (3.6)	41'3" (12.6)
				37.3 (16.9)	*41.0 (18.6)	24.2 (11.0)	*33.8 (15.3)	17.3 (7.9)	*26.1 (11.8)	13.0 (5.9)	*21.5 (9.7)	10.0 (4.6)	*17.2 (7.8)	*7.5 (3.4)	*8.6 (3.9)	
	-5 ft (-1.52 m)	*17.3 (7.8)	*17.3 (7.8)	36.0 (16.3)	*39.7 (18.0)	23.2 (10.5)	*33.5 (15.2)	16.6 (7.5)	*25.8 (11.7)	12.5 (5.7)	*20.9 (9.5)	9.7 (4.4)	*16.9 (7.6)	8.0 (3.6)	*8.9 (4.1)	39'8" (12.1)
		*18.4 (8.3)	*18.4 (8.3)	36.0 (16.3)	*41.9 (19.0)	23.2 (10.5)	*35.7 (16.2)	16.6 (7.5)	*27.5 (12.5)	12.5 (5.7)	*21.5 (9.7)	9.7 (4.4)	*16.9 (7.6)	8.0 (3.6)	*9.6 (4.3)	
	-10 ft (-3.05 m)	*27.3 (12.4)	*27.3 (12.4)	35.7 (16.2)	*45.3 (20.6)	22.7 (10.3)	*33.4 (15.2)	16.2 (7.3)	*25.0 (11.3)	12.2 (5.6)	*20.8 (9.4)	9.6 (4.4)	*16.7 (7.6)	8.9 (4.0)	*10.3 (4.7)	37'3" (11.4)
		*28.9 (13.1)	*28.9 (13.1)	35.7 (16.2)	*48.3 (21.9)	22.7 (10.3)	*35.7 (16.2)	16.2 (7.3)	*27.7 (12.6)	12.2 (5.6)	*21.2 (9.6)	9.6 (4.4)	*16.7 (7.6)	8.9 (4.0)	*11.0 (5.0)	
	-15 ft (-4.57 m)	*39.9 (18.1)	*39.9 (18.1)	35.9 (16.3)	*41.7 (18.9)	22.6 (10.3)	*31.5 (14.3)	16.1 (7.3)	*24.6 (11.2)	12.2 (5.6)	*19.4 (8.8)			10.5 (4.8)	*12.6 (5.7)	33'10" (10.3)
		*42.1 (19.1)	*42.1 (19.1)	35.9 (16.3)	*44.5 (20.2)	22.6 (10.3)	*33.7 (15.3)	16.1 (7.3)	*26.4 (12.0)	12.2 (5.6)	*20.8 (9.4)			10.5 (4.8)	*13.4 (6.1)	
	-20 ft (-6.10 m)	*47.6 (21.6)	*47.6 (21.6)	*35.4 (16.1)	*35.4 (16.1)	23.1 (10.5)	*27.3 (12.4)	16.4 (7.5)	*21.1 (9.6)					*12.8 (5.8)	*12.8 (5.8)	28'11" (8.8)
		*50.9 (23.1)	*50.9 (23.1)	36.7 (16.6)	*37.9 (17.2)	23.1 (10.5)	*29.3 (13.3)	16.4 (7.5)	*22.6 (10.3)					13.8 (6.3)	*13.9 (6.3)	
	-25 ft (-7.62 m)			*25.0 (11.3)	*25.0 (11.3)	*19.1 (8.7)	*19.1 (8.7)									
				*26.9 (12.2)	*26.9 (12.2)	*20.6 (9.3)	*20.6 (9.3)									


with heavy-lifting system

Notes: 1. Ratings are based on SAE J1097.

2. Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook (not standard equipment) loaded on the back of the bucket.

4. *Indicates load limited by hydraulic capacity.



A: Load radius
B: Load point height
C: Lifting capacity

ENGLISH MEASURE

EX450LCH-3c

Rating over-side or 360 degrees Rating over-front Unit: 1 000 lb (1 000 kg)


Conditions	Load point height	Load radius												At max. reach		
		10 ft (3.05 m)		15 ft (4.57 m)		20 ft (6.10 m)		25 ft (7.62 m)		30 ft (9.14 m)		35 ft (10.67 m)		ft in (m)	ft in (m)	ft in (m)
		Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front			
Boom 23'0" (7.0 m) H-boom Arm 11'2" (3.4 m) H-arm Bucket PCSA: 2.38 yd ³ (1.82 m ³) Rock bucket Shoes 24" (600 mm)	25 ft (7.62 m)													*7.4 (3.4)	*7.4 (3.4)	34'2" (10.4)
	20 ft (6.10 m)							*16.4 (7.4)	*16.4 (7.4)	12.7 (5.8)	*15.3 (6.9)			*7.4 (3.4)	*7.4 (3.4)	36'5" (11.1)
	15 ft (4.57 m)					22.0 (10.0)	*22.0 (10.0)	17.5 (7.9)	*18.3 (8.3)	12.3 (5.6)	*16.1 (7.3)			7.5 (3.4)	*7.6 (3.4)	37'8" (11.5)
	10 ft (3.05 m)					23.9 (10.8)	*23.6 (10.7)	16.4 (7.4)	*19.6 (8.9)	11.7 (5.3)	*17.2 (7.8)			7.1 (3.2)	*8.0 (3.6)	38'1" (11.6)
	5 ft (1.52 m)					22.0 (10.0)	*30.1 (13.6)	15.3 (7.0)	*22.6 (10.3)	11.1 (5.0)	*18.4 (8.3)	8.1 (3.7)	*12.7 (5.8)	7.0 (3.2)	*8.6 (3.9)	37'10" (11.5)
	0 (Ground)			*21.7 (9.9)	*21.7 (9.9)	20.9 (9.5)	*31.7 (14.4)	14.6 (6.6)	*23.9 (10.9)	10.6 (4.8)	*19.1 (8.7)			7.3 (3.3)	*9.7 (4.4)	36'9" (11.2)
				*23.2 (10.5)	*23.2 (10.5)	20.9 (9.5)	*34.0 (15.4)	14.6 (6.6)	*25.7 (11.7)	10.6 (4.8)	*19.4 (8.8)			7.3 (3.3)	*10.4 (4.7)	
	-5 ft (-1.52 m)			33.4 (15.1)	*39.0 (17.7)	20.5 (9.3)	*31.4 (14.2)	14.2 (6.4)	*24.1 (10.9)	10.3 (4.7)	*18.9 (8.6)			8.1 (3.7)	*11.2 (5.1)	34'9" (10.6)
				33.4 (15.1)	*41.3 (18.7)	20.5 (9.3)	*33.6 (15.3)	14.2 (6.4)	*26.0 (11.8)	10.3 (4.7)	*19.1 (8.7)			8.1 (3.7)	*12.0 (5.5)	
	-10 ft (-3.05 m)	*34.5 (15.6)	*34.5 (15.6)	33.8 (15.3)	*37.4 (17.0)	20.5 (9.3)	*29.2 (13.3)	14.1 (6.4)	*22.7 (10.3)	10.4 (4.7)	*17.3 (7.9)			9.8 (4.4)	*13.8 (6.2)	31'9" (9.7)
		*36.5 (16.6)	*36.5 (16.6)	33.8 (15.3)	*40.1 (18.2)	20.5 (9.3)	*31.4 (14.2)	14.1 (6.4)	*24.4 (11.1)	10.4 (4.7)	*18.7 (8.5)			9.8 (4.4)	*14.7 (6.7)	
	-15 ft (-4.57 m)	*36.9 (16.7)	*36.9 (16.7)	31.3 (14.2)	*31.3 (14.2)	21.0 (9.5)	*24.9 (11.3)	14.5 (6.6)	*19.1 (8.6)							
		*39.7 (18.0)	*39.7 (18.0)	33.6 (15.3)	*33.6 (15.3)	21.0 (9.5)	*26.8 (12.2)	14.5 (6.6)	*20.6 (9.3)							
	-20 ft (-6.10 m)			*21.4 (9.7)	*21.4 (9.7)	*16.8 (7.6)	*16.8 (7.6)									
				*23.2 (10.5)	*23.2 (10.5)	*18.3 (8.3)	*18.3 (8.3)									

with heavy-lifting system

- Notes:
1. Ratings are based on SAE J1097.
 2. Lifting capacity of the Super EX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook (not standard equipment) loaded on the back of the bucket.
 4. *Indicates load limited by hydraulic capacity.


BACKHOE

Basic machine without sidewalk

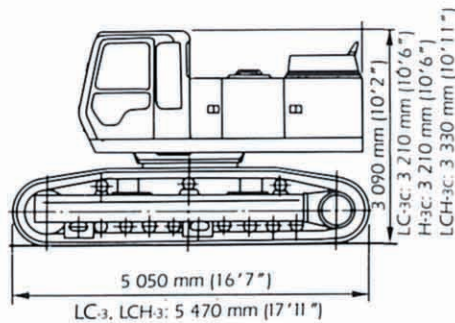

	Shoe width	Overall width*	Weight
EX400-3c	600 mm (24")	3 340 mm (10'11")	24 400 kg (53 800 lb)
	750 mm (30")	3 490 mm (11'5")	25 400 kg (56 000 lb)
	900 mm (35")	3 640 mm (11'11")	25 500 kg (56 200 lb)
EX400LC-3c	600 mm (24")	3 160 mm (10'4")	26 900 kg (59 300 lb)
	750 mm (30")	3 200 mm (10'6")	28 000 kg (61 700 lb)
	900 mm (35")	3 290 mm (10'10")	28 100 kg (61 900 lb)
EX450H-3c	600 mm (24")	3 340 mm (10'11")	25 700 kg (56 700 lb)
	750 mm (30")	3 490 mm (11'5")	26 800 kg (59 100 lb)
	900 mm (35")	3 640 mm (11'11")	26 900 kg (59 300 lb)
EX450LCH-3c	600 mm (24")	3 160 mm (10'4")	28 100 kg (61 900 lb)
	750 mm (30")	3 200 mm (10'6")	29 300 kg (64 600 lb)
	900 mm (35")	3 290 mm (10'10")	29 400 kg (64 800 lb)

Basic machine fitted with boom and no sidewalk

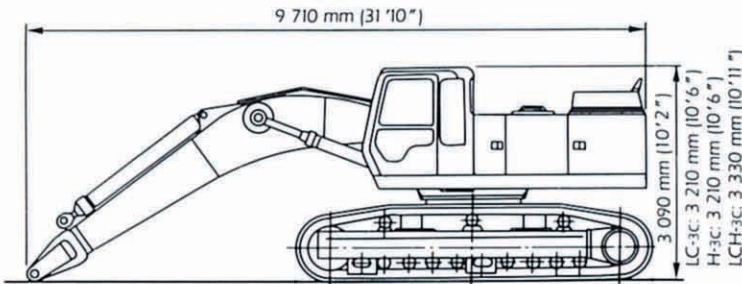


	Shoe width	Overall width**	Weight
EX400-3c	600 mm (24")	3 340 mm (10'11")	28 500 kg (62 800 lb)
	750 mm (30")	3 490 mm (11'5")	29 500 kg (65 000 lb)
	900 mm (35")	3 640 mm (11'11")	29 600 kg (65 300 lb)
EX400LC-3c	600 mm (24")	3 160 mm (10'4")	31 000 kg (68 300 lb)
	750 mm (30")	3 200 mm (10'6")	32 100 kg (70 800 lb)
	900 mm (35")	3 290 mm (10'10")	32 200 kg (71 000 lb)
EX450H-3c* ¹	600 mm (24")	3 340 mm (10'11")	30 000 kg (66 100 lb)
	750 mm (30")	3 490 mm (11'5")	31 000 kg (68 300 lb)
	900 mm (35")	3 640 mm (11'11")	31 200 kg (68 800 lb)
EX450 LCH-3c* ¹	600 mm (24")	3 160 mm (10'4")	32 400 kg (71 400 lb)
	750 mm (30")	3 200 mm (10'6")	33 500 kg (73 900 lb)
	900 mm (35")	3 290 mm (10'10")	33 700 kg (74 300 lb)

*¹ With H-boom

**² LC-type undercarriage retracted

Basic machine with front and sidewalk EX400-3c: 41 700 kg (91 900 lb) EX450H-3c: 43 800 kg (96 600 lb)
EX400LC-3c: 45 400 kg (100 100 lb) EX450LCH-3c: 46 200 kg (101 900 lb)

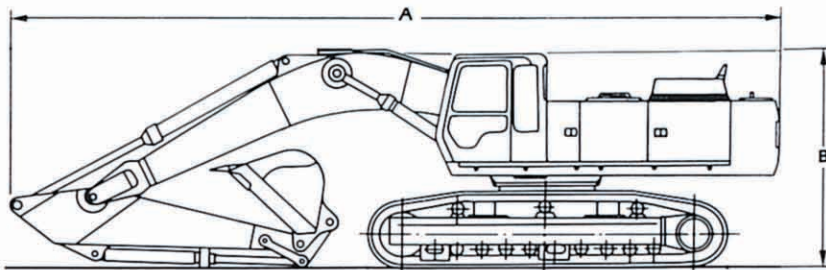


Overall length and overall height

Arm		2.9 m (9'6")	3.4 m (11'2")	*3.4 m (11'2")	3.9 m (12'10")	4.9 m (16'10")
EX400-3c	A	11 900 mm (39'1")	11 820 mm (38'9")		11 820 mm (38'9")	11 630 mm (38'2")
	B	3 560 mm (11'8")	3 450 mm (11'4")		3 470 mm (11'5")	4 660 mm (15'4")
EX400LC-3c	A	11 880 mm (38'11")	11 790 mm (38'8")		11 790 mm (38'8")	11 700 mm (38'5")
	B	3 600 mm (11'10")	3 480 mm (11'5")		3 480 mm (11'5")	4 660 mm (15'4")
EX450H-3c	A			11 820 mm (38'9")		
	B			3 450 mm (11'4")		
EX450LCH-3c	A			11 790 mm (38'8")		
	B			3 480 mm (11'5")		

* H-front

Arm & Bucket

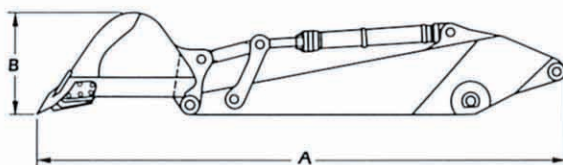

EX400-3c / EX450H-3c

Arm	Bucket PCSA heaped	Weight	A	B	Overall width
2.9 m (9'6")	2.07 m ³ (2.71 yd ³)	3 900 kg (8 600 lb)	6 010 mm (19'9")	1 270 mm (4'2")	1 630 mm (5'4")
3.4 m (11'2")	1.82 m ³ (2.38 yd ³)	3 800 kg (8 380 lb)	6 430 mm (21'1")	1 270 mm (4'2")	1 500 mm (4'11")
*1 3.4 m (11'2")	*2 1.82 m ³ (2.38 yd ³)	4 400 kg (9 700 lb)	6 370 mm (20'11")	1 470 mm (4'10")	1 420 mm (4'8")
3.9 m (12'10")	1.60 m ³ (2.09 yd ³)	3 900 kg (8 600 lb)	6 930 mm (22'9")	1 270 mm (4'2")	1 360 mm (4'6")
4.9 m (16'1")	1.36 m ³ (1.78 yd ³)	3 500 kg (7 720 lb)	7 760 mm (25'6")	1 170 mm (3'10")	1 410 mm (4'8")


EX400LC-3c / EX450LCH-3c

Arm	Bucket PCSA heaped	Weight	A	B	Overall width
2.9 m (9'6")	2.28 m ³ (2.98 yd ³)	4 100 kg (9 040 lb)	6 030 mm (19'9")	1 340 mm (4'5")	1 660 mm (5'5")
3.4 m (11'2")	2.07 m ³ (2.71 yd ³)	3 900 kg (8 600 lb)	6 430 mm (21'1")	1 270 mm (4'2")	1 630 mm (5'4")
*1 3.4 m (11'2")	*2 1.82 m ³ (2.38 yd ³)	4 400 kg (9 700 lb)	6 370 mm (20'11")	1 470 mm (4'10")	1 420 mm (4'8")
3.9 m (12'10")	1.82 m ³ (2.38 yd ³)	4 000 kg (8 800 lb)	6 930 mm (22'9")	1 270 mm (4'2")	1 500 mm (4'11")
4.9 m (16'1")	1.36 m ³ (1.78 yd ³)	3 500 kg (7 720 lb)	7 760 mm (25'6")	1 170 mm (3'10")	1 410 mm (4'8")

*1 H-arm

*2 Rock bucket

Bucket




Bucket

Capacity		A	B	Width	Weight
PCSA heaped	CECE heaped				
1.36 m ³ (1.78 yd ³)	1.20 m ³	1 800 mm (5'11")	1 350 mm (4'5")	1 410 mm (4'8")	1 170 kg (2 580 lb)
1.60 m ³ (2.09 yd ³)	1.40 m ³	1 940 mm (6'4")	1 570 mm (5'2")	1 360 mm (4'6")	1 460 kg (3 220 lb)
1.82 m ³ (2.38 yd ³)	1.60 m ³	1 940 mm (6'4")	1 570 mm (5'2")	1 500 mm (4'11")	1 550 kg (3 420 lb)
2.07 m ³ (2.71 yd ³)	1.80 m ³	1 940 mm (6'4")	1 570 mm (5'2")	1 630 mm (5'4")	1 630 kg (3 590 lb)
2.28 m ³ (2.98 yd ³)	2.00 m ³	1 950 mm (6'5")	1 650 mm (5'5")	1 660 mm (5'5")	1 780 kg (3 920 lb)
* 1.82 m ³ (2.38 yd ³)	1.60 m ³	1 950 mm (6'5")	1 650 mm (5'5")	1 420 mm (4'8")	1 980 kg (4 370 lb)


* Rock bucket

LOADING SHOVEL


Basic machine with front and sidewalk; 43 400 kg (95 700 lb)

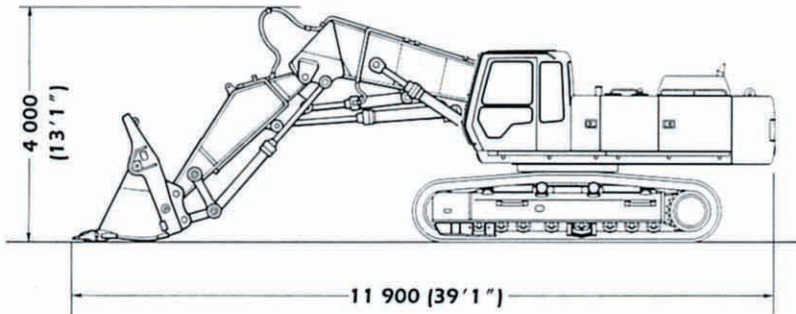


Front assembly; 9 470 kg (20 900 lb)
with 2.60 m³ (3.40 yd³) Bottom dump bucket

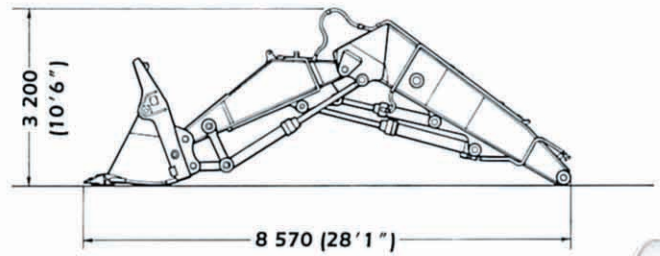

Width; 3 350 (11'0")
with bottom dump bucket

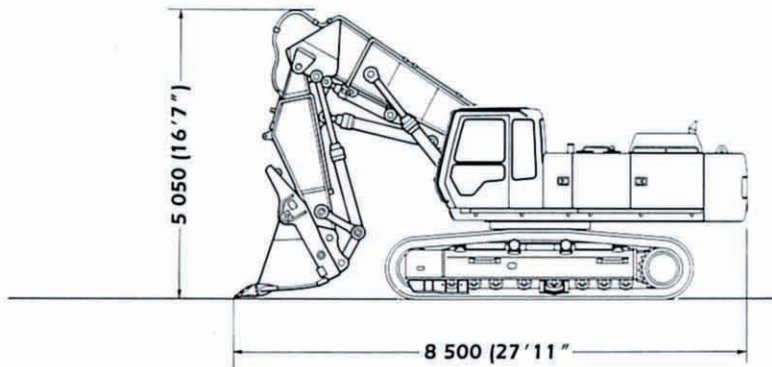


Bucket




Unit: mm (ft in)

Bucket capacity	A	B	Width	Weight
2.30 m ³ (3.01 yd ³)	2 060 mm	2 140 mm	1 860 mm	3 380 kg
Bottom dump bucket	(6'9")	(7'0")	(6'1")	(7 450 lb)
2.60 m ³ (3.40 yd ³)	2 020 mm	2 140 mm	2 030 mm	3 050 kg
Bottom dump bucket	(6'8")	(7'0")	(6'8")	(6 720 lb)

Counterweight 9 300 kg (20 500 lb)

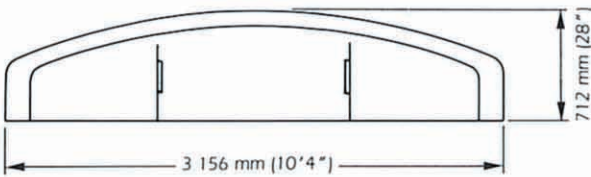

Sidewalk 30 kg (66 lb)

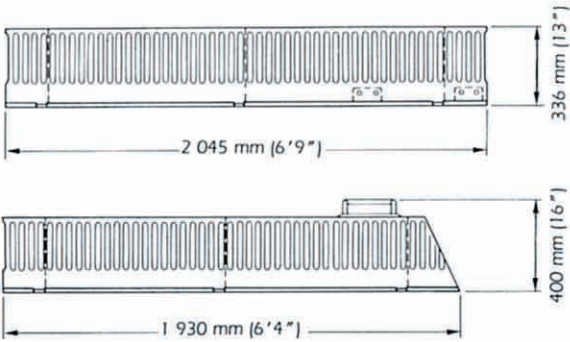

 Hitachi Construction Machinery Co., Ltd.

Head Office: Nippon Bldg., 6-2, 2-chome, Ohtemachi,
Chiyoda-ku, Tokyo 100, Japan

Telephone: Tokyo (03) 3245-6390

Facsimile: Tokyo (03) 3246-2609

These specifications are subject to change without notice.
Illustrations and photos show the standard models, and may or may not include optional
equipment, accessories, and all standard equipment.

